
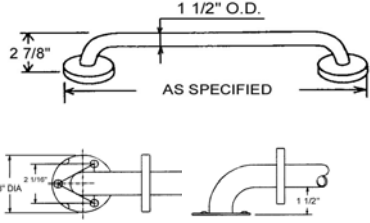

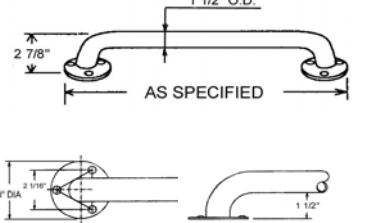

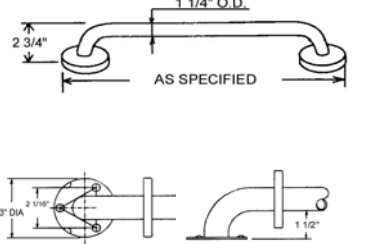

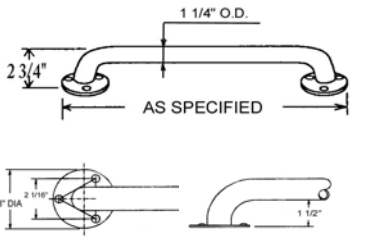


BETTER HOME PRODUCTS

HEAVY DUTY STAINLESS STEEL GRAB BARS

Available in 12", 18", 24", 30", 36", 42" & 48" Lengths (C-C)

<p>HC SERIES</p> 		<p>BHP 1 1/2" O.D. Bar, Concealed Screw</p> <p>Type 304 stainless steel, satin finish. Surface mount, concealed screw application. Packed with 6Pcs #10x2" stainless steel mounting screws.</p> <p>Bars – 1 1/2" O.D., 0.050" (18 gauge) wall thickness type 304 stainless steel. 1 1/2" wall clearance</p> <p>Flanges - 0.078" (14 gauge) type 304 stainless steel and are heliarc-welded to tubing. Twist-lock cover flanges are of 0.035" (20 gauge) stainless steel</p>
<p>HE SERIES</p> 		<p>BHP 1 1/2" O.D. Bar, Exposed Screw</p> <p>Type 304 stainless steel, satin finish. Surface mount, exposed screw application. Packed with 6Pcs #10x2" stainless steel mounting screws.</p> <p>Bars – 1 1/2" O.D., 0.050" (18 gauge) wall thickness type 304 stainless steel. 1 1/2" wall clearance</p> <p>Flanges - 0.078" (14 gauge) type 304 stainless steel and are heliarc-welded to tubing.</p>
<p>QC SERIES</p> 		<p>BHP 1 1/4" O.D. Bar, Concealed Screw</p> <p>Type 304 stainless steel, satin finish. Surface mount, concealed screw application. Packed with 6Pcs #10x2" stainless steel mounting screws.</p> <p>Bars – 1 1/4" O.D., 0.050" (18 gauge) wall thickness type 304 stainless steel. 1 1/2" wall clearance</p> <p>Flanges - 0.078" (14 gauge) type 304 stainless steel and are heliarc-welded to tubing. Twist-lock cover flanges are of 0.035" (20 gauge) stainless steel</p>
<p>QE SERIES</p> 		<p>BHP 1 1/4" O.D. Bar, Exposed Screw</p> <p>Type 304 stainless steel, satin finish. Surface mount, exposed screw application. Packed with 6Pcs #10x2" stainless steel mounting screws.</p> <p>Bars – 1 1/4" O.D., 0.050" (18 gauge) wall thickness type 304 stainless steel. 1 1/2" wall clearance</p> <p>Flanges - 0.078" (14 gauge) type 304 stainless steel and are heliarc-welded to tubing.</p>

MEETS ADA CODE REQUIREMENTS