
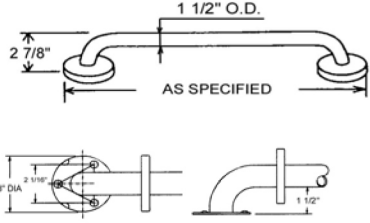

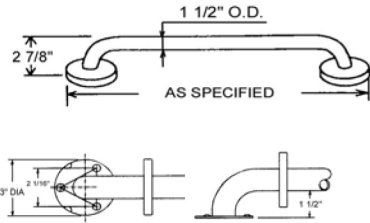

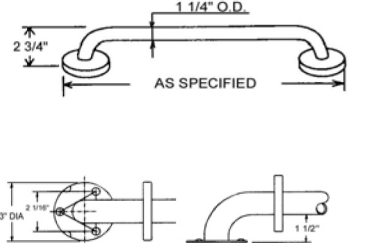


BETTER HOME PRODUCTS

HEAVY DUTY STAINLESS STEEL GRAB BARS

Available in 12", 18", 24", 30", 36", 42" & 48" Lengths (C-C)

<p>HC SERIES</p>  <p>SS Finish</p>		<p>BHP 1 1/2" O.D. Bar, Concealed Screw Type 304 stainless steel, satin finish. Surface mount, concealed screw application. Packed with 6Pcs #10x2" stainless steel mounting screws. Bars – 1 1/2" O.D., 0.050" (18 gauge) wall thickness type 304 stainless steel. 1 1/2" wall clearance Flanges - 0.078" (14 gauge) type 304 stainless steel and are heliarc-welded to tubing. Twist-lock cover flanges are of 0.035" (20 gauge) stainless steel</p>
<p>BLK HC SERIES</p>  <p>Matte Black Finish</p>		<p>BHP 1 1/2" O.D. Bar, Concealed Screw Type 304 stainless steel, satin finish. Surface mount, concealed screw application. Packed with 6Pcs #10x2" stainless steel mounting screws. Bars – 1 1/2" O.D., 0.050" (18 gauge) wall thickness type 304 stainless steel. 1 1/2" wall clearance Flanges - 0.078" (14 gauge) type 304 stainless steel and are heliarc-welded to tubing. Twist-lock cover flanges are of 0.035" (20 gauge) stainless steel</p>
<p>QC SERIES</p>  <p>SS Finish</p>		<p>BHP 1 1/4" O.D. Bar, Concealed Screw Type 304 stainless steel, satin finish. Surface mount, concealed screw application. Packed with 6Pcs #10x2" stainless steel mounting screws. Bars – 1 1/4" O.D., 0.050" (18 gauge) wall thickness type 304 stainless steel. 1 1/2" wall clearance Flanges - 0.078" (14 gauge) type 304 stainless steel and are heliarc-welded to tubing. Twist-lock cover flanges are of 0.035" (20 gauge) stainless steel</p>

MEETS ADA CODE REQUIREMENTS FOR FORCES UP TO 500 LBS WHEN PROPERLY INSTALLED